



Full Length Research Article

THE CHEMICAL COMPOSITION AND PHYSICS RICE HUSKS USED AS AN ABSORBER PLATE

¹Humayatul Ummah Syarif, ²Suriamihardja, D. A., Mary Selintung and ⁴Abdul Wahid Wahab

¹Department of Civil Engineering, Hasanuddin University, Indonesia

²Department of Physics, Hasanuddin University, Indonesia

³Department of Civil Hasanuddin University, Indonesia

⁴Department of Natural Knowledge and Mathematic of Science, Hasanuddin University, Indonesia

ARTICLE INFO

Article History:

Received 10th March, 2015
Received in revised form
21st April, 2015
Accepted 30th May, 2015
Published online 28th June, 2015

Key words:

Distillation,
Briquettes Absorber,
Rice Husk,
Clean Water.

ABSTRACT

Rice husk is a removal waste from its grain that can be used as an absorber in the distillation process using solar energy (sunlight) to convert seawater into clean water. This process will be supported by carrying out necessary study on the material properties to be used as the absorbent which is made of rice husk briquettes. The chemical composition of rice husk obtained after the process comparing to before the process of distillation using SEM. The study using SEM, there is an increase before and after the process distillation. For 100% Normalized Sum matrix is 2.37% (before the process) and 2.82% (after the process). It means that there is an increase percentage of about 0.45%.

Copyright © 2015 Humayatul Ummah Syarif et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

INTRODUCTION

Rice husk is a removal waste from its grain that can be used as an absorber in the distillation process using solar energy (sunlight) to convert seawater into clean water. This process will be supported by carrying out necessary study on the material properties to be used as the absorbent which is made of rice husk briquettes. Rice husk resulting from the milling process by 20% of the production of rice, while the number of rice husk ash 18% of the amount of chaff.

Research Objectives

The purpose of the study is to look at the chemical composition and Physics rice husks that have been burned and made into briquettes. Absorber plate is made of compacted and assess such effects on the distillation process is done with the help of sunlight to make sea water into clean water. Rice husk is a waste of grain that can be used as absorber in the

distillation process with the help of sunlight to convert seawater into clean water. Cover glass is made in the form of a greenhouse roof with a slope of 30. And to facilitate the flow of water in the glass during evaporating sea water into clean water. This study is expected to rice husk briquettes can accelerate the process of evaporation of sea water with a layer of very thin. Above sea level in rice husk briquettes inside this research tool is 15 mm to 25 mm is considered constant. The purpose of this study "Examining the chemical composition of rice husk briquettes, whether it can be used as an absorber in the distillation process to convert seawater into clean water with the help of sunlight"

RESULTS AND DISCUSSION

The microanalysis Report chemical composition of rice husk briquette before and after the distillation process using SEM (Scanning Electron Microscope) is summarize in Table 1. Results using SEM showed that Si content is quite large followed by O2 in the rice husk, and Calcium and Aluminium. Results obtained by using XRF showed that rice husk contains Cl sizeable and the Silica. SEM showed that rice husk contains silica which is quite large and then oxygen.

**Corresponding author: Humayatul Ummah Syarif
Department of Civil Engineering, Hasanuddin University, Indonesia*

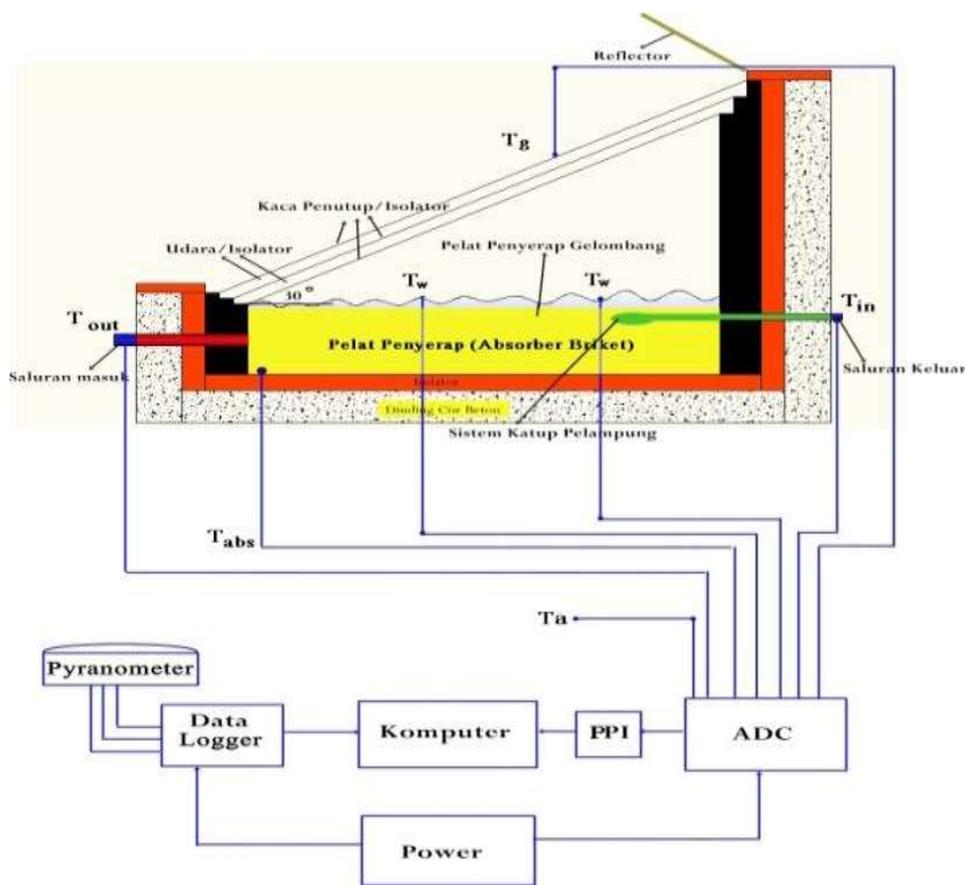


Figure 1. The distillation process Rice husk

Tabel 1. The composition Briquette Rice Husk before and After Undergoing the Process of Distillation

No. Element		Before			After			Remarks	
	Wt%	At%	Intensity	Wt%	At%	Intensity	Wt&At	Intensity	
1.	CK	13.58	22.72	2,66	10.18	17.47	0,92	Down	
2.	NK	2.13	3.05	1,06	2.34	3.44	0,58	Up	
3.	OK	27.16	34.13	4,84	30.41	39.18	4,35	Up	
4.	FeL	3.41	1.23	2,03	6.83	2.52	1,72	Up	
5.	NaK	0.43	0.37	0,61	0.19	0.17	0,46	Down	
6.	MgK	0.40	0.33	0,46	0.74	0.63	0,35	Up	
7.	AlK	10.66	7.94	0,97	13.82	10.56	2,52	Up	
8.	SiK	42.23	30.23	8,03	35.49	26.04	5,37	Down	

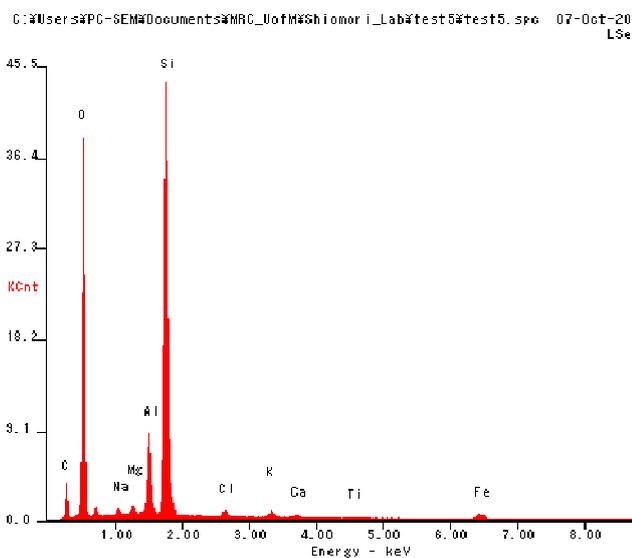


Figure 2. The results graph before process

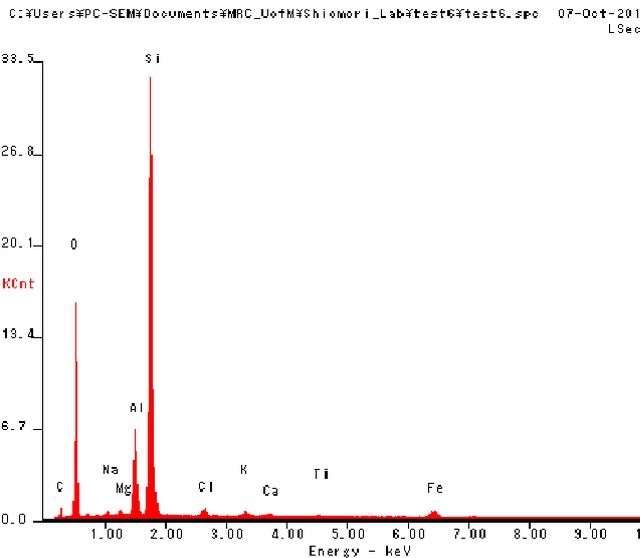


Figure 3. The results graph after the distillation the distillation process

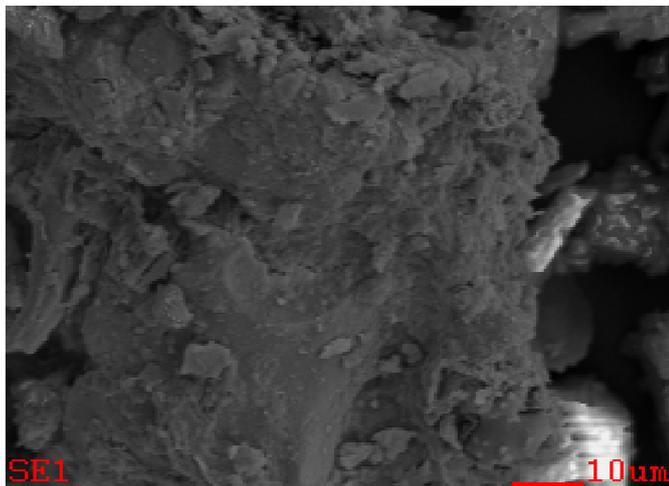


Figure 4. Show the composition of rice husk briquettes graph using an SEM before the distillation process

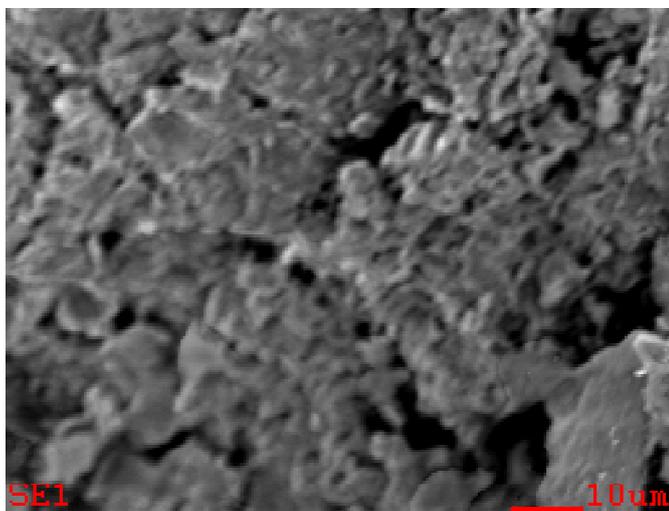


Figure 5. Show the composition of rice husk briquettes graph using an SEM after the distillation process

distillation process. The chemical composition of rice husk is used as an absorber after the distillation process increased as a result of the evaporation of sea water into clean water. The results showed that the production of sea water can be converted into clean water by looking at the values of pH, salinity, sulfate (SO₄), carbonate (CO₃), Calcium (Ca), magnesium (Mg), chloride (Cl), Sodium and Potassium turned into composition clean water that is fit for use by humans. Figure 4 and Figure 5 show the analysis process of the rice husk using the SEM. This suggests that rice husk can be used as an absorbent in distillation process seawater into clean water.

Literature References

The distillation process seawater into clean water (1). Rice husk is a hard layer covering *caryopsis*, consisting of parts of the lemma and *plea* is interlocked, commonly found in the area of rice milling. Husk has a density of 125 kg/m³ bulk density (Alpesh Mehta *et al.*, 2011). The composition of rice husk ash silica dominated (Freeke Pangkarego, 2006).

Summary

The results showed that rice husk briquettes can be used as an absorber plate in the distillation process to convert sea water into clean water. Although the composition of sea water can be converted into clean water but do not qualify to be directly in the drink because the pH value does not qualify for at drink. The results of the graph show that the value of silica decreased which is a compound that converts sea water into clean water. The chemical composition of rice husk obtained after distillation process has been increased in view of the results of XRF, Sum Conc's before normalization. 100%: 16.3% and the after process distillation 19.9%. Means an increase of 3.6%. Parallel to the study using SEM (Scanning Electron Microscope), there is an increase before and after the distillation process for 100% normalized sum

Table 2. Chemical Composition OF Water Produced from the distillation process

No.	Parameters	Result	Unit	Quality	Remarks
				requirement	
1.	pH.	5.5	-	6.5 - 8.5	No Good
2.	Colors.	Normal	-	Normal	Good
3.	Suspension solids	24	mg/L	50	Good
4.	Dissolved solids	140	mg/L	500	Good
5.	Total solids	164	mg/L	1000	Good
6.	Sulfate as BaSO ₄ .	108	mg/L	250	Good
7.	NaCl.	13	mg/L	411	Good
8.	Sodium.	5	mg/L	200	Good
9.	Chloride.	8	mg/L	250	Good
10.	Organic substances	19	mg/L	10	No. Good

XRF tool showed that the composition of sea compound after undergoing the distillation process is used as an absorbent impaired Si=30. 48m/m% (prior to the refining process) is converted into Si=22: 27m/m% (After the distillation process). Figure 2, shows the graph value Si ≥ 42.23 as absorbent before undergoing the distillation process and Figure 3 shows the graph value Si ≥ 35.49 as absorbent after undergoing the

matrix is 2.37% (before) and 2.82% (after). It means that there is an increase percentage of about 0.45%.

REFERENCES

Advanced Science and Tekhnologi. Vol 29. Faculty of Technology and Engineering. Maharaja Sayaji Rao University of Baroda, India.

- Alpesh Mehta, Prof, *et al.*, 2011. *Int. J Adv. Sci. Technol.*, 29, 67.
- Freeke Pangkarego, 2006. Rice Husk Briquettes for Alternative Energy Substitute Firewood and Kerosene. Department in Agricultural Technology, Faculty of Agriculture UNSRAT, Manado. Indonesia.
- Folleto, E.L., Ederson, G., Leonardo, H.O. and Sergio, J. 2006. Conversion of Rice Hull Ash into Sodium Silicate. *Material Research*, Vol 9 No. 3. H.335-338. Brazil.
- Humayatul, U.S., Dadang, A.S., Mary, S., Abdul Wahid, W. and Koichiro Shiomori, 2014. Effect of Chemical Composition of Rice Husk Used as an Absorber Plate making Sea water into Clean Water. The Society of Chemical Engineers Japan (SCEJ) Regional meeting in Himeji. C207. H.80.
- Ismail, N.R. and Fuhaid, N., 2012. *Int. J. Res. Eng. Tech.*, 1.207.
